



UP STAND ACCESS HATCH

Zefyr AH-US

Format

Ground or Roof

Access

Single Flap (SF) or Double Flap (DF)

Design

Curb Upstand

Opening

Ranging from 300mm to 1000mm

Loading

Pedestrian (standard)

Seals

Lid Mounted Compression Seals

Lid Stay

Safety Locking Stay

Furniture

Hasp & Staple (standard) or Slam Latch with Internal Release

Anti-Slip Lid

Chequer Plate, Anti-slip Paint or Anti-slip Tape

Safety

None, Safety Grid or Alarm

Material

Aluminium, Stainless Steel or Steel Galvanised

Finish

Colour and finish PPC / PVF2 to Zefyr Standard Colour / Gloss Lev

Features

- Upstand design - low profile - minimal visual impact
- High performance construction designed to fit onto ground curb upstands.
- Available in Galvanised Mild Steel / Stainless Steel / Aluminium / Cromweld Stainless Steel.
- Lid mounted compression seals
- "Zeflok" – safety locking stay with padlock "stay-open" provision
- Combination safety grid / ladder extension with integral hand grip
- Comprehensive range of colours and finishes
- Spring assisted hinged lid suitable for one-man operation, in compliance with Manual Handling Operations Regulations 1992
- Standard padlock locking mechanism
- Loading conforms to EN 124 – Class A15 / BS497 Class C – Pedestrian Loading

Options



- Slam latch with internal release
- Replaceable fine mesh air vents, fitted and concealed by the closed lid to prevent interference
- Anti-slip lid
- Chequer plate lid
- Magnetic contact
- Coating options include – polyester powder coat, galvanised (steel)
- Pre-formed galvanised steel upstand – "Additional Security" and "Same Day Completion"
- Drain holes built in to customer individual requirements.
- Side lifting handles



Techniqual Data

Dimentions (mm)			Weights (kg)		
Model	Throat Length	Throat Width	Model	Aluminium	M or S Steel
AH-US-SF001	300	300	AH-US-SF001	12	36
AH-US-SF002	600	600	AH-US-SF002	26 (+1.5)	76 (+4.0)
AH-US-SF003	750	750	AH-US-SF003	31 (+1.7)	92 (+5.0)
AH-US-SF004	900	900	AH-US-SF004	37 (+2.3)	110 (+7.0)
AH-US-SF005	1000	1000	AH-US-SF005	41 (+3.7)	123 (+8.0)

Standard clear opening dimensions for other sizes contact Zefyr

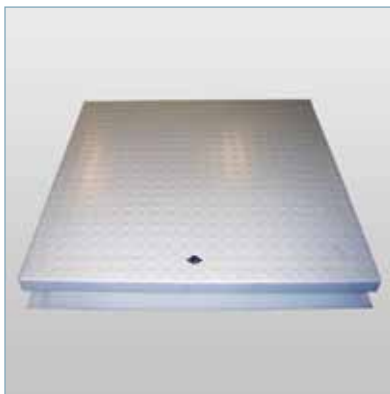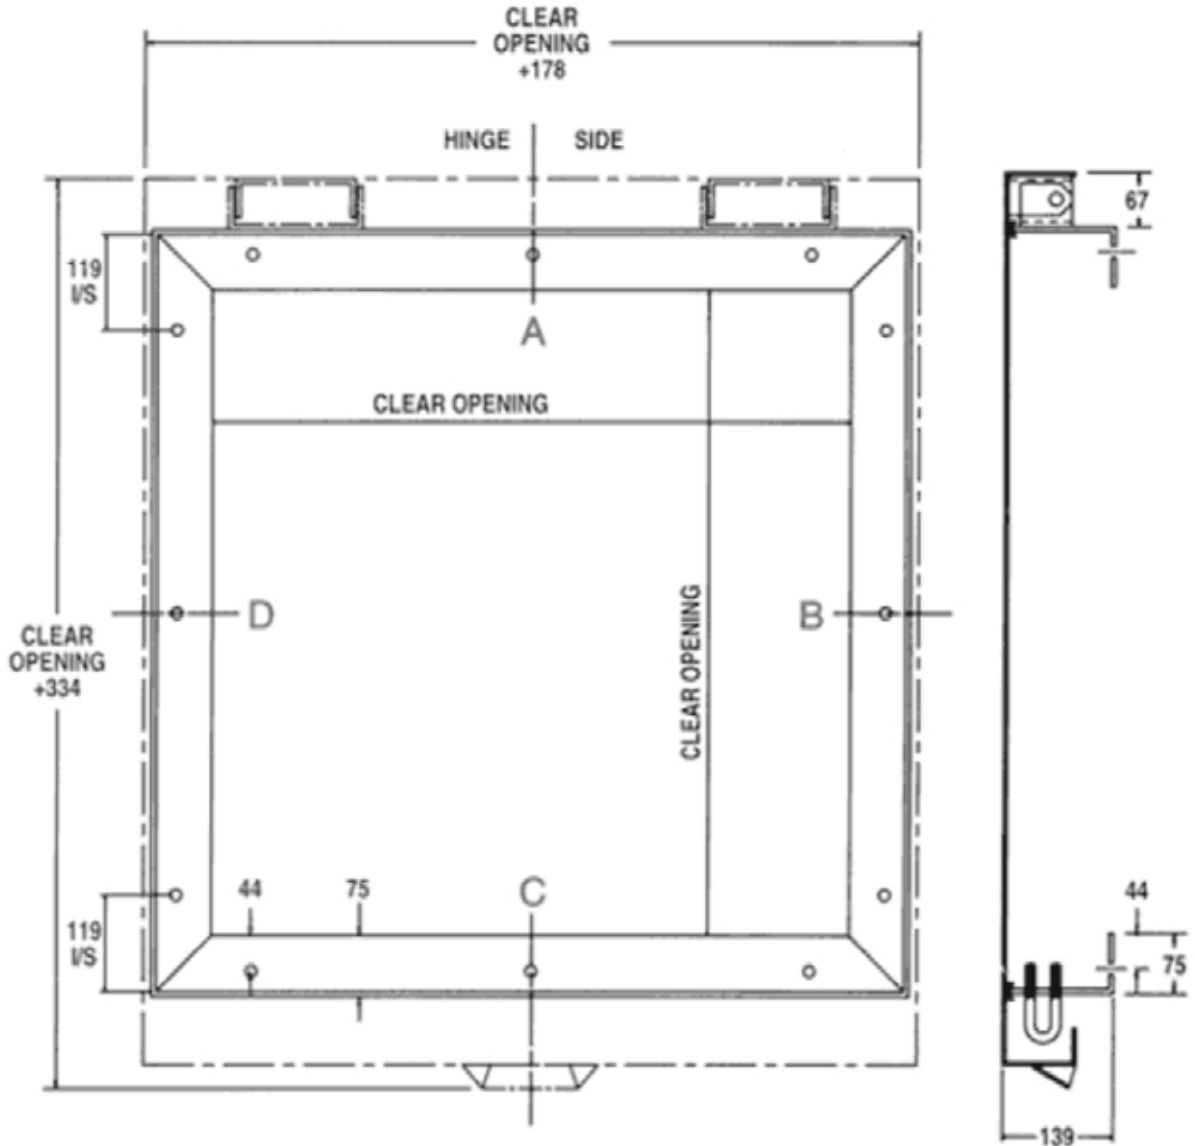

NBS Specifications

Zefyr Up Stand Access Hatch System

* Optional to complete / delete as appropriate

Manufacturer	Zefyr, Home Farm, Stockton Road, Abberley, Worcestershire, WR6 6AS T +44 (0) 870 600 1356 F +44 (0) 870 600 1356 E mail@zefyrgroup.com
Loading	EN 124 – Class A15 / BS497 Class C - Pedestrian
Configuration	Fully assembled, tested and palletised.
Format	* Ground / Roof
Clear Opening	“A” x “B” - to be specified -hinges on “longest side”.
Construction	Fully welded construction
Lid and Body	* Aluminium / Mild Steel / 304 Stainless Steel / 316 Stainless Steel / Cromweld Stainless Steel
Seals	Lid mounted compression seals
Furniture	Hasp and staple fitted as standard. Padlock supplied by others. * Slam latch with internal release
Lid Stay	“Zeflok” – safety locking stay with padlock “stay-open” provision
Ventilation	* Replaceable fine mesh air vents, fitted and concealed by the closed lid to prevent interference
Anti-Slip Lid	* Chequer plate / Anti slip paint / Anti slip tape
Safety Grid	* Safety grid designed to fold flat within the depth of the hatch when closed.
Fixings	* Supplied to suit
Ground Details	Curb up stand by others – Zefyr optional supply Zefyr
Base Finish	* Mill finish aluminium / Mill finish stainless steel / Mild steel galvanised after manufacture BS EN ISO 1461:1999 – standard.
Colour Coating	* Colour and finish PPC / PVF2 to Zefyr Standard Colour / Gloss Level
Alarm	* Magnetic contacts

zefyrgroup.com



Innovative Building Solutions for
a Sustainable Environment

Zefyr Access Hatch Data Sheet Up Stand Access Hatch